
Sealco Commercial Vehicle Products

MADE IN U.S.A SINCE 1939

Directional Control Valve – 5 Port / 2 Position Valve Family






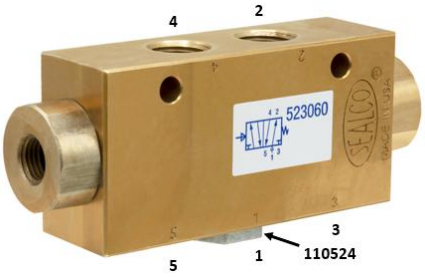



Bayonet Connector



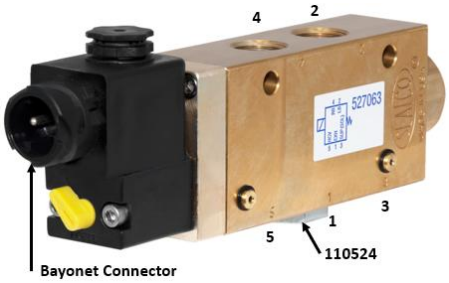

- Commonly used to operate lift axles, gates, cylinders, locking actuators & other air operated devices

- Includes exhaust cap in Port 1 (110524) to prevent contamination which may be moved to other ports depending upon application. 152000 series Includes an exhaust breather in port 1 (715152) and a breathable plug installed in Pilot Port which may be removed to act as air piloted auto reset.

- Solenoid versions are dual-pressure input and operated with override switch/lever or knob/shaft assembly, connected with heavy duty bayonet connector with two conductor 14AWG 18” cable or two 19” 20AWG primary wires for connection. Single pressure input solenoid valves can be made available if need be.

- Corrosion resistant plated body with clear anodized internal spool

- Specially engineered O-rings designed to function in extreme cold temperatures

- Two-hole body mount on most variants. Single hole mount on manual versions.

- Fast flow rate valve with enlarged oval shaped internal openings

- Designed specifically for heavy duty transportation industry



152000



13 (BLACK PLASTIC)



0190 (BLACK METAL)

PART NUMBER	ALL PORT SIZES (NPT)	DESCRIPTION
152000	¼"	Manual w/ 13 Knob
152010	¼"	Manual w/ 0190 Knob
521160	3/8"	Manual with Boot
521060	3/8"	Manual without Boot
521060F	3/8"	Manual without Boot, Pre-Installed 3/8" NPT-PTC Fittings On All Ports
523060	3/8"	Air Pilot
523060F	3/8"	Air Pilot w/ Pre-Installed 3/8" NPT-PTC Fittings + ¼" NPT 90 Degree 3/8 PTC On Pilot Port
523160	3/8"	Air Pilot w/ Pre-Installed Exhaust Seals (110524) in Port 3 and Port 5
525063	3/8"	Solenoid Valve w/ Wire Leads (Dual Pressure Input)
527061	3/8"	Solenoid Valve w/ Cable (Single Pressure Input) Axles Normally Down
527061W	3/8"	Solenoid Valve w/ Cable (Single Pressure Input) w/ Air Pilot Feature Axles Normally Down
527063	3/8"	Solenoid Valve w/ Cable (Double Pressure Input) Axles Normally Down
527063W	3/8"	Solenoid Valve w/ Cable (Double Pressure Input) w/ Air Pilot Feature Axles Normally Down
527065	3/8"	Solenoid Valve w/ Cable (Double Pressure Input) Axles Normally Up
527065W	3/8"	Solenoid Valve w/ Cable (Double Pressure Input) w/ Air Pilot Feature Axles Normally Up
529163	3/8"	30mm Solenoid Valve w/ Manual Override + DIN Bayonet w/ boot (Dual Pressure Input)
529163F	3/8"	30mm Solenoid Valve w/ Manual Override + DIN Bayonet w/ boot (Dual Pressure Input) W/ Pre-Installed 3/8" PTC Fittings In all Ports.
529161	3/8"	30mm Solenoid Valve w/ Manual Override + DIN Bayonet w/ boot (Single Pressure Input)
528063	3/8"	22mm Solenoid Valve w/ Manual Override no boot (Dual Pressure Input)